
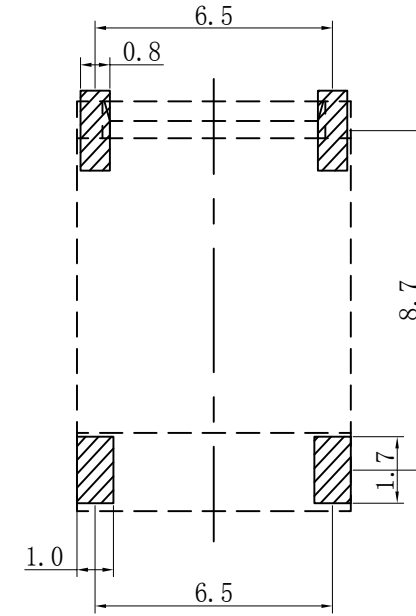
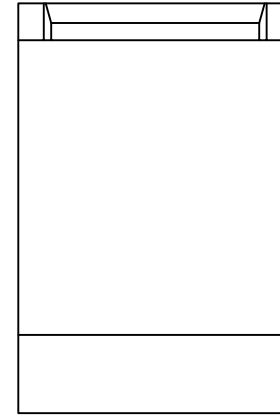
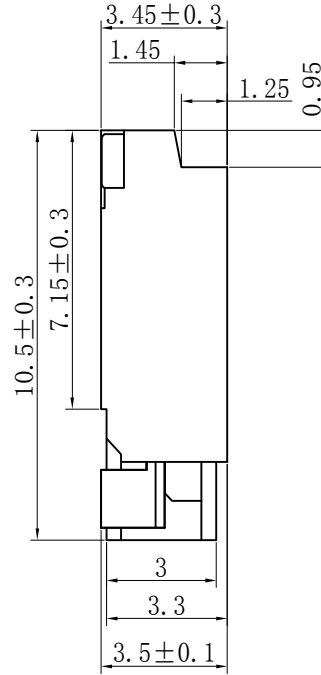

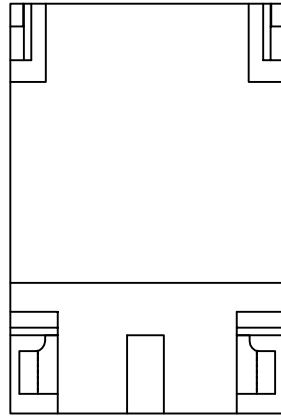


Specifications

Housing: LCP UL94-V0 Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 1400V AC/DC
 Current Rating: 1A AC/DC
 Withstand Voltage: 3000V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500m\Omega$
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$



PCB BOARD LAYOUT

一般公差 TOLERANCES X. ± 0.40 .XX ± 0.20 .X ± 0.30 .XXX ± 0.10 ANGLES $\pm 2^{\circ}$		深圳市宏利电子有限公司 Shenzhen Holy Electronic Co.,Ltd	
检验尺寸标示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION \odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.		工程 图号 BH35GY-2P	制图 (DR) '08/5/16 审核 (CHKD)
表面处理 (FINISH)		品名 BH3.5mm - 2P 高压插座 TITLE BH3.5mm Pitch WT FOR SMT CONN	核准 (APPD) Rigo Lu 张数 (SHEET) 1 OF 1 单位 (UNITS) mm 尺寸 (SIZE) A4 版本 (REV) 0

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-